


AD-A050 568

DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/G 13/10  
CAVITATION PERFORMANCE CHARACTERISTICS OF SUPERCavitATING PROPE--ETC(U)  
DEC 77 J G PECK

UNCLASSIFIED

SPD-680-02

NL

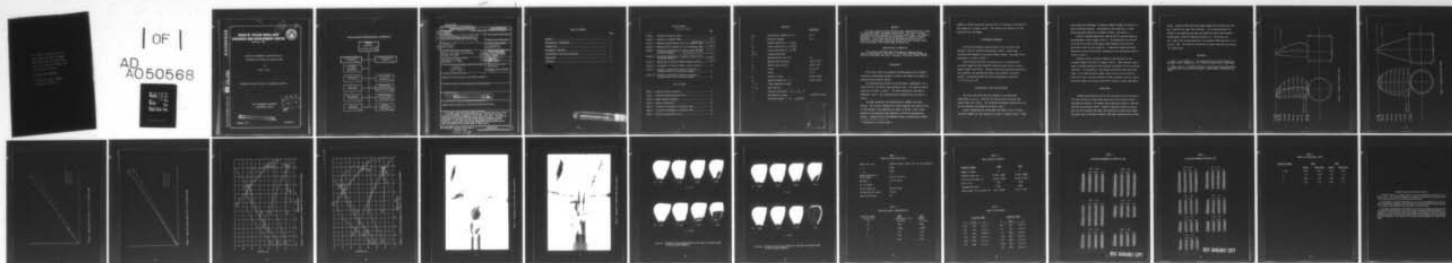

END  
DATE  
FILMED

4 -78

DDC

THIS REPORT HAS BEEN DELIMITED  
AND CLEARED FOR PUBLIC RELEASE  
UNDER DOD DIRECTIVE 5200.20 AND  
NO RESTRICTIONS ARE IMPOSED UPON  
ITS USE AND DISCLOSURE.

DISTRIBUTION STATEMENT A

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

AD A 050568

DDC FILE COPY

CAVITATION PERFORMANCE CHARACTERISTICS

**DAVID W. TAYLOR NAVAL SHIP  
RESEARCH AND DEVELOPMENT CENTER**

Bethesda, Md. 20084




CAVITATION PERFORMANCE CHARACTERISTICS OF  
SUPERCAVITATING PROPELLERS 4698 AND 4699

by

James G. Peck

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED

SHIP PERFORMANCE DEPARTMENT  
DEPARTMENTAL REPORT




**ORIGINAL CONTAINS COLOR PLATES: ALL DDC  
REPRODUCTIONS WILL BE IN BLACK AND WHITE**

December 1977

SPD-680-02

# MAJOR DTNSRDC ORGANIZATIONAL COMPONENTS

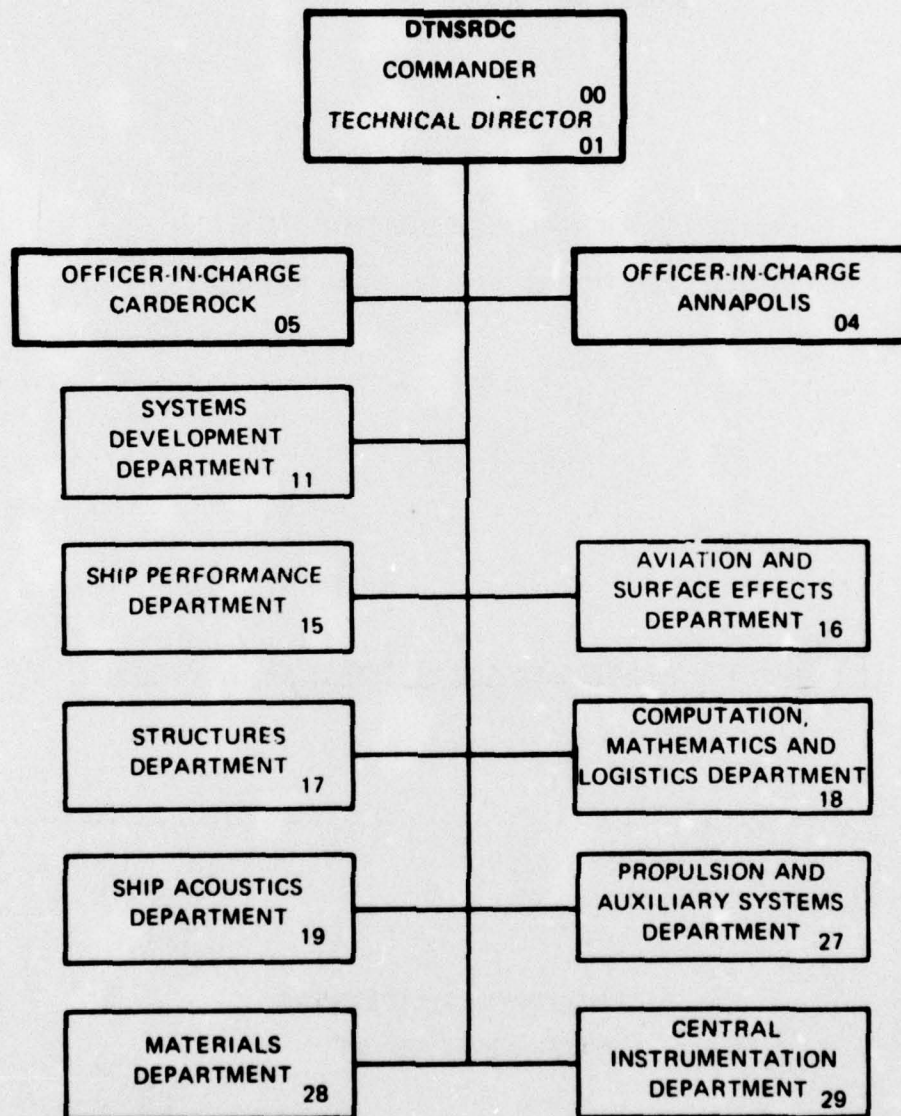



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER SPD-680-02	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) CAVITATION PERFORMANCE CHARACTERISTICS OF SUPERCAVITATING PROPELLERS 4698 AND 4699		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) James G. Peck		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS David W. Taylor Naval Ship R&D Center Bethesda, MD 20084		8. CONTRACT OR GRANT NUMBER(s) F43421
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Material Command Washington, D.C. 203 0		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Work Unit 1-1500-2101 Task Area ZF 43421001 Element 62543N
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 1224p.		12. REPORT DATE December 1977 ✓
		13. NUMBER OF PAGES 23
		15. SECURITY CLASS. (of this report) UNCLASSIFIED
16. DISTRIBUTION STATEMENT (of this Report) APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES (21) ORIGINAL CONTAINS COLOR PLATES; ALL DDC REPRODUCTIONS WILL BE IN BLACK AND WHITE.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Supercavitating Propellers, Cavitation, Advance Coefficient		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Two model supercavitating propellers were characterized over a range of cavitation numbers and advance coefficients. The results of these characterizations are presented in curves and tabular form. The propeller performance as predicted from these experiments is compared to design prediction. It was found that one of the propellers would reach 95 percent of design speed at design rpm whereas the other propeller would reach 109 percent of its design speed at design rpm.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 68 IS OBSOLETE  
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

389 694

43

## TABLE OF CONTENTS

	Page
ABSTRACT.....	1
ADMINISTRATIVE INFORMATION.....	1
INTRODUCTION.....	1
EXPERIMENTAL PROCEDURE.....	2
PRESENTATION OF DATA AND DISCUSSION.....	2
CONCLUSIONS.....	3
REFERENCES.....	4

PRECEDING PAGE BLANK-NOT FILLED

# LIST OF FIGURES

TABLE OF CONTENTS

	Page
Figure 1 - Drawing of Propeller 4698.....	5
Figure 2 - Drawing of Propeller 4699.....	6
Figure 3 - Measured Section Shape at 0.7 R of Propeller 4698.....	7
Figure 4 - Measured Section Shape at 0.7 R of Propeller 4699.....	8
Figure 5 - Cavitation Performance of Propeller 4698 at Three Cavitation Numbers.....	9
Figure 6 - Cavitation Performance of Propeller 4699 at Three Cavitation Numbers.....	10
Figure 7 - Photograph of Propeller 4698 at Design Condition.....	11
Figure 8 - Photograph of Propeller 4699 at Design Condition.....	12
Figure 9 - Sketches of Cavitation Present on the Back of Propeller 4698 at Two Cavitation Numbers.....	13
Figure 10 - Sketches of Cavitation Present on the Back of Propeller 4699 at Two Cavitation Numbers.....	14

# LIST OF TABLES

Table 1 - Propeller Design Conditions.....	15
Table 2 - Propeller Design Characteristics.....	15
Table 3 - Model Propeller Geometry.....	16
Table 4 - Scope of Experiments.....	16
Table 5 - Cavitation Performance of Propeller 4698.....	17
Table 6 - Cavitation Performance of Propeller 4699.....	18
Table 7 - Propeller Operational Points.....	19



# NOTATION

## Dimensions

$C_{0.7}$	Blade-section length at 0.7 R	ft, m
D	Propeller diameter	ft, m
J	Advance coefficient $J = V_a/nD$	
$K_Q$	Torque coefficient $K_Q = Q/\rho n^2 D^5$	
$K_T$	Thrust coefficient $K_T = T/\rho n^2 D^4$	
$K_T/J^2$	Loading coefficient	
n	Revolutions per unit time	· rps
P	Ambient static pressure	lb/ft <sup>2</sup> , N/m <sup>2</sup>
$P_v$	Ambient vapor pressure	lb/ft <sup>2</sup> , N/m <sup>2</sup>
Q	Torque	ft-lb, N·m
T	Thrust	lb, N
V	Velocity of boat	ft/sec, m/sec
$V_a$	Speed of advance $V(1 - w)$	ft/sec, m/sec
$1 - t$	Thrust deduction fraction	
$1 - w_t$	Wave fraction	
$\eta$	Propeller efficiency $\eta = K_T \cdot J / K_Q \cdot 2\pi$	
$\rho$	Mass density of water	lb-sec <sup>2</sup> /ft <sup>4</sup> , Kg/m <sup>3</sup>
$\sigma$	Cavitation number $\sigma = (P - P_v)/(\frac{1}{2}\rho V^2)$	

APPROPRIATE FOR		
WTR	Rate Section	<input checked="" type="checkbox"/>
END	Test Section	<input type="checkbox"/>
UNRECORDED		<input type="checkbox"/>
JUSTIFICATION		
BT		
DISTRIBUTION/AVAILABILITY CODES		
DATE	APPROV. NO.	SPECIAL
A		

## ABSTRACT

Two model supercavitating propellers were characterized over a range of cavitation numbers and advance coefficients. The results of these characterizations are presented in curves and tabular form. The propeller performance as predicted from these experiments is compared to design prediction. It was found that one of the propellers would reach 95 percent of design speed at design rpm whereas the other propeller would reach 109 percent of its design speed at design rpm.

## ADMINISTRATIVE INFORMATION

This work was performed under Naval Material Command funding. Program identification at the David W. Taylor Naval Ship R&D Center was Work Unit 1-1500-200, Task Area ZF 43421001, and Project Element 62543N.

## INTRODUCTION

David Taylor Naval Ship Research and Development Center (DTNSRDC) conducted an experimental program to evaluate two present day methods of supercavitating propeller design.

Two supercavitating propellers were designed, independently, for a typical 200 ton (181 metric tons) hydrofoil craft. The propeller design conditions are given in Table 1. The design methods are published in References 1 and 2.\* The propeller design characteristics are given in Table 2.

Two model propellers were manufactured at DTNSRDC from these designs. The principal dimensions of these propellers are given in Table 3, and drawings of the propellers are shown in Figures 1 and 2. After manufacture the propellers were measured to verify the manufacturing process. Computer plots of the measured values of blade section offsets

---

\* References are listed on page 4



compared to design values are given for the 0.7 R section of one blade of each propeller in Figures 3 and 4. The sections are typical of all the sections of all the blades.

#### EXPERIMENTAL PROCEDURE

Cavitation performance characteristics of the propellers were obtained in the 36" Variable Pressure Water Tunnel. Tunnel water velocities were measured on the tunnel venturi system. The scope of the experiments is listed in Table 4.

Tunnel pressure and water velocity were set to establish each cavitation number and then propeller revolutions were varied to cover a range of speed coefficients. Propeller thrust and torque were measured at each condition, and sketches were made of the propeller cavitation present. The Reynolds numbers during the experiments ranged from  $7.5 \times 10^5$  to  $5.6 \times 10^6$ .

#### PRESENTATION OF DATA AND DISCUSSION

The thrust and torque data were reduced to non-dimensional coefficients  $K_T$  and  $K_Q$ . Propeller efficiencies were calculated from faired values of  $K_T$  and  $K_Q$ . The cavitation performance characteristics of the two propellers are presented in Tables 5 and 6.

Curves representing the faired data from Tables 5 and 6 at three cavitation numbers for each propeller are shown in Figures 5 and 6. These

curves show the performance of Propellers 4698 and 4699 to be typical of supercavitating propellers. Photographs of the propellers, at their design-operating condition, are shown in Figure 7 and Figure 8.

Curves of maximum speed thrust loading ( $K_T/J^2$ ) have been added to the performance curves (Figure 5 and 6). The intersection of the  $K_T/J^2$  curve and the  $K_T$  curve at the design sigma determines the predicted operational point for each propeller. A comparison between the design operational points and the points determined by the experimental data are listed in Table 7.

Sketches of back cavitation present on the propellers at two cavitation numbers are given in Figures 9 and 10. These sketches cover a range of advance coefficient from partially cavitating to fully cavitating conditions. The propellers at any advance coefficient lower than those shown, at the same cavitation number, would also be fully cavitating. There was no face cavitation present on either propeller over the range of cavitation numbers and advance coefficients covered in these experiments.

### CONCLUSIONS

Although both propellers had no face cavitation and had essentially full back cavitation at the design operational point neither propeller performed as predicted. The method used in designing Propeller 4698 over predicted the available thrust. Propeller 4698 would require 5 percent more rpm and 19 percent more power than predicted to reach design speed. The method used in designing Propeller 4699 under predicted the available

thrust. Propeller 4699 would reach design speed with 8 percent less rpm and 17 percent less power than predicted. If the operating point is defined as the speed and rpm where the propellers absorb the available maximum power, Propeller 4698 would operate at  $V = 55.6$  knots and rpm = 1000; while the operating point for Propeller 4699 would be  $V = 61.0$  and rpm = 970. The propeller efficiencies at these conditions are 52% and 73%, respectively.

#### REFERENCES

1. Bohn, J. and Altmann, R., "Two Supercavitating Propeller Designs for Hydrofoil Ships," Hydronautics, Inc. Technical Report 7607.01 (May 1976).
2. Baker, Elwyn S., "Engineering Design of Two Supercavitating Propellers Using Modified Lifting Surface Programs," DTNSRDC Report SPD-680-01 (Aug 1977).



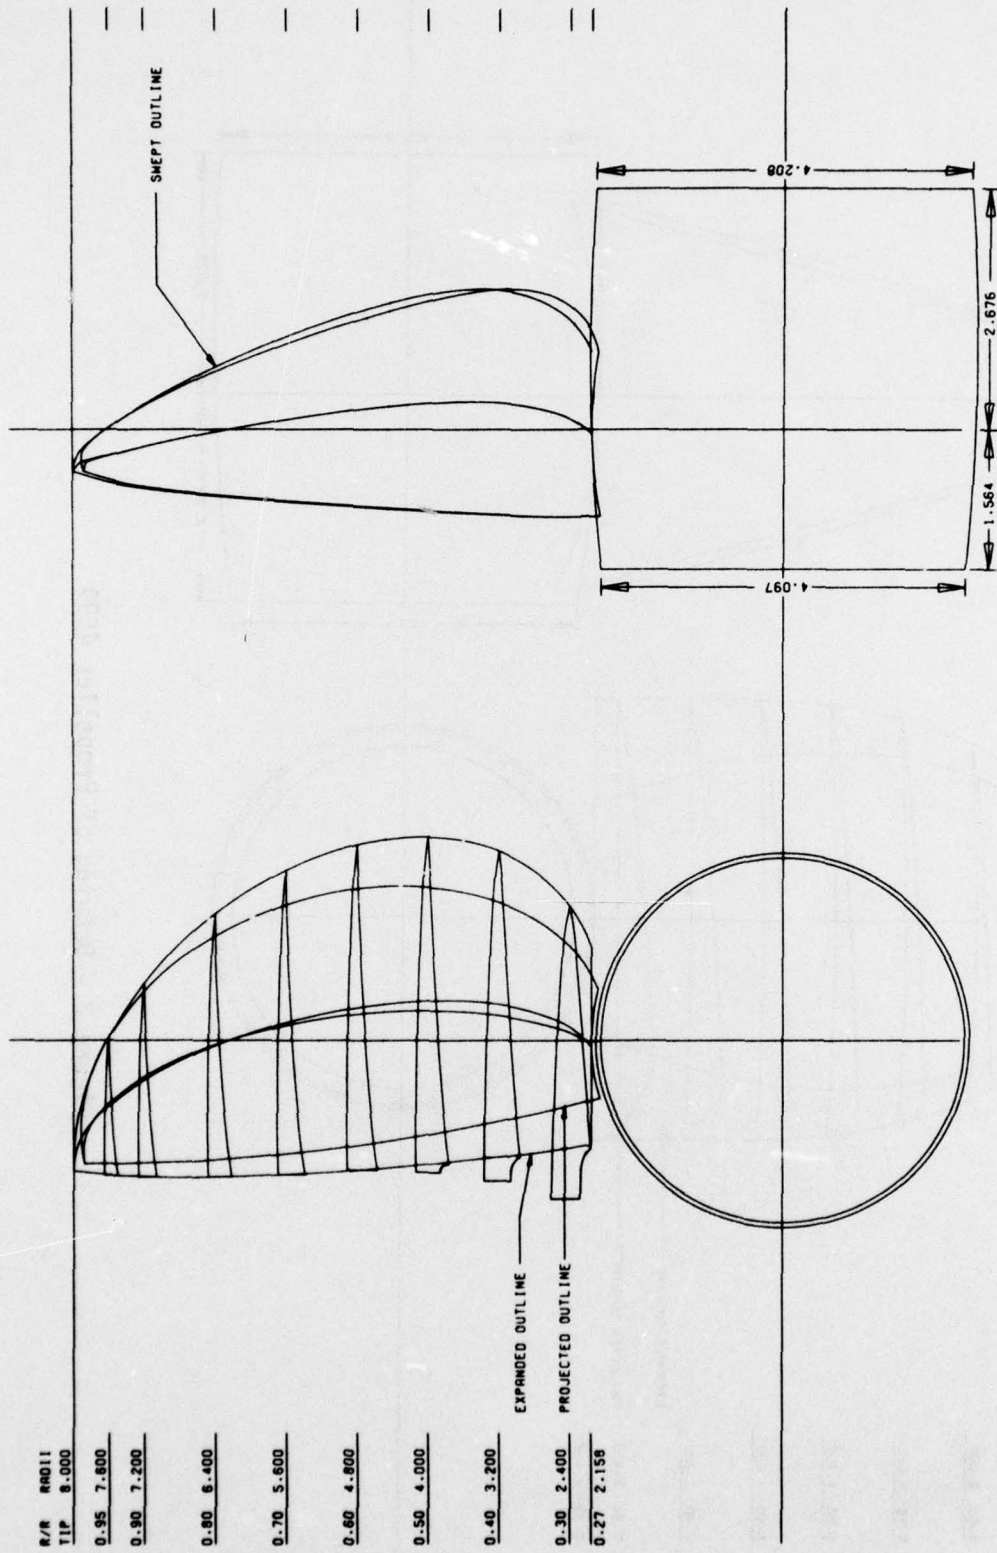


Figure 1 - Drawing of Propeller 4698

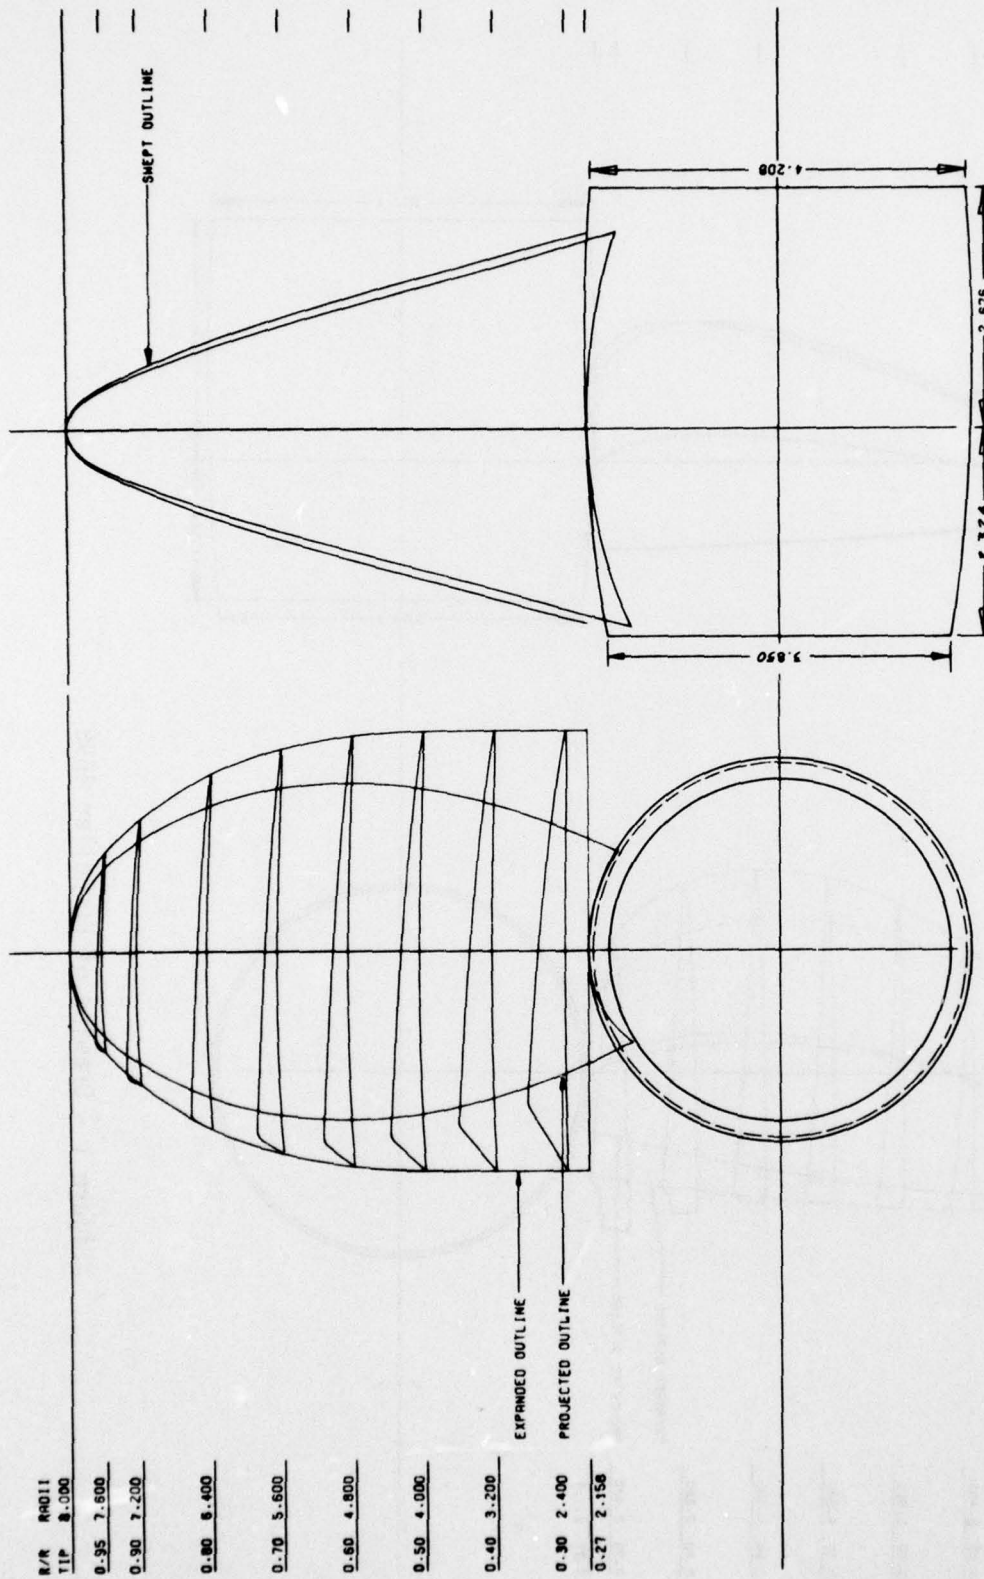


Figure 2 - Drawing of Propeller 4699



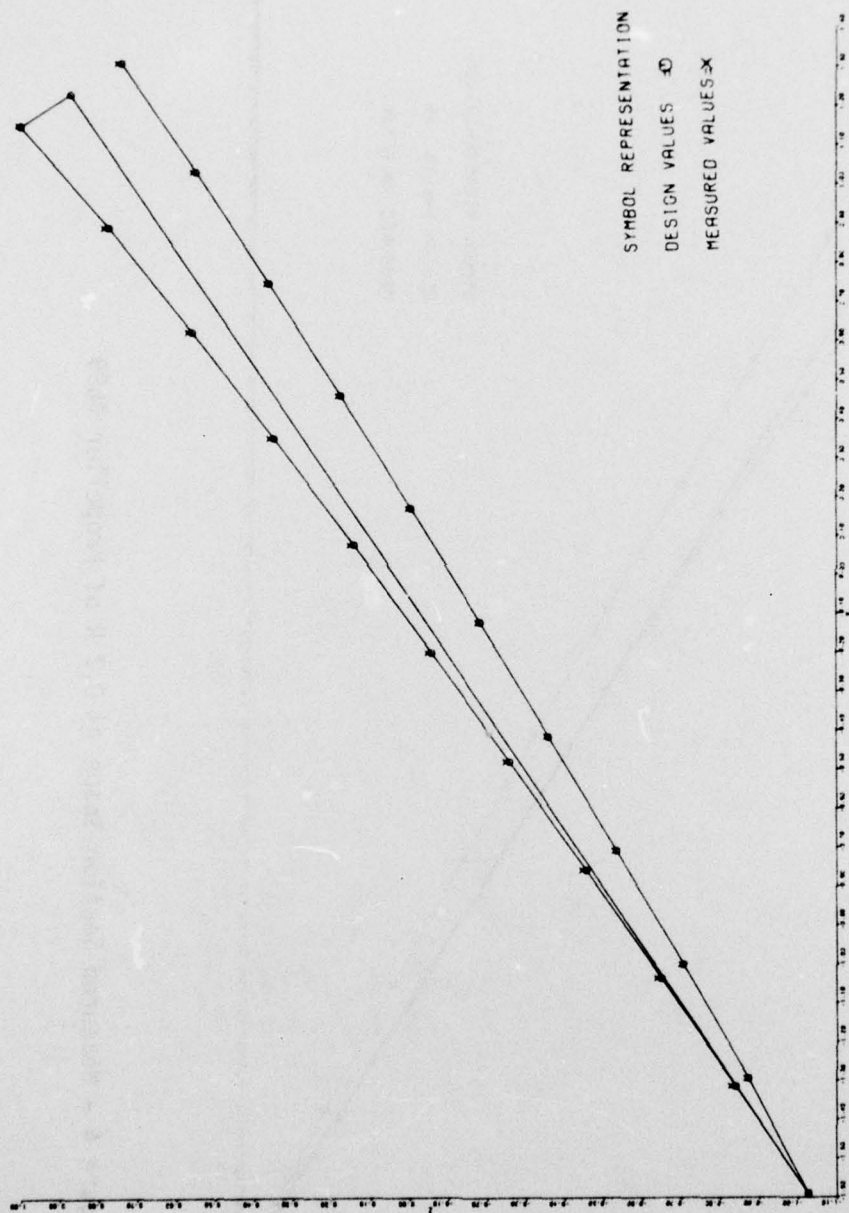


Figure 3 - Measured Section Shape at 0.7 R of Propeller 4698

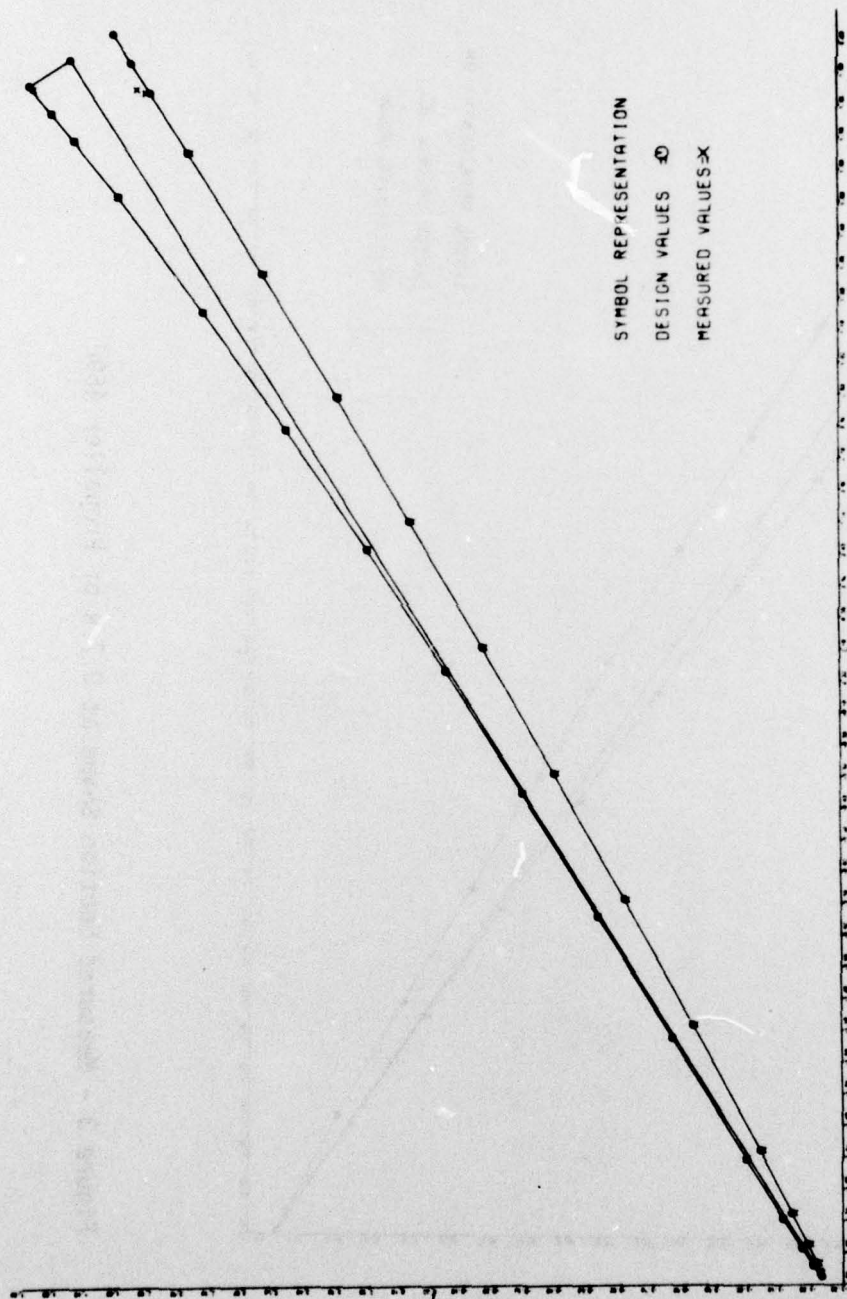


Figure 4 - Measured Section Shape at 0.7 R of Propeller 4699

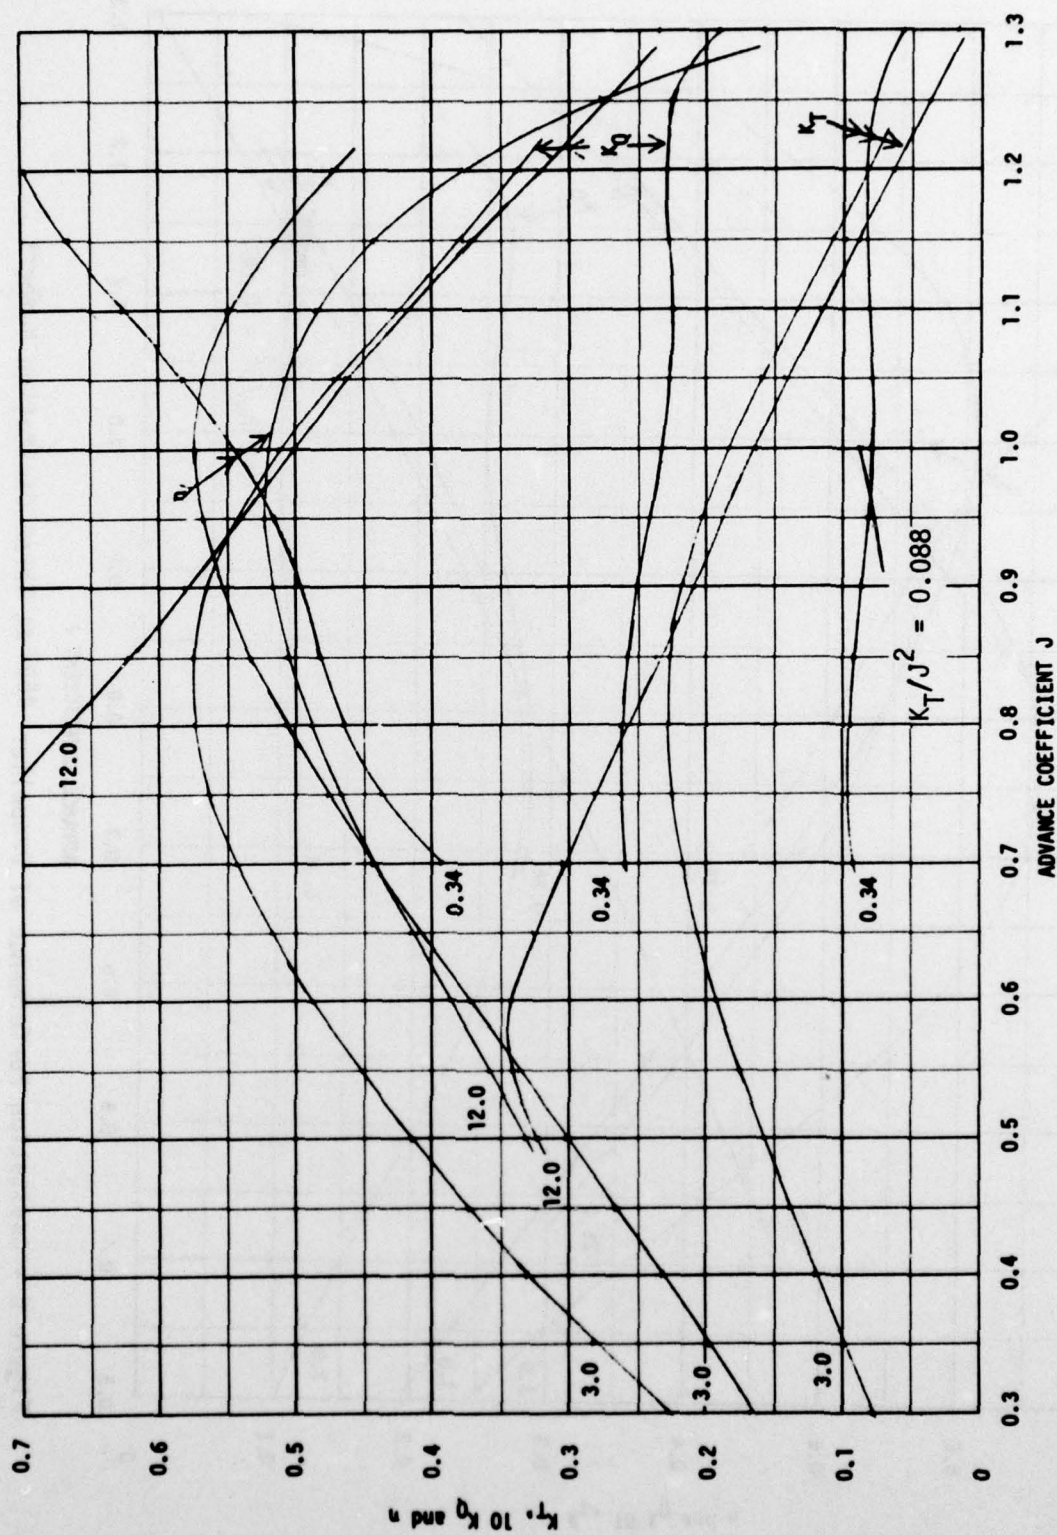


Figure 5 - Cavitation Performance of Propeller 4698 at Three Cavitation Numbers



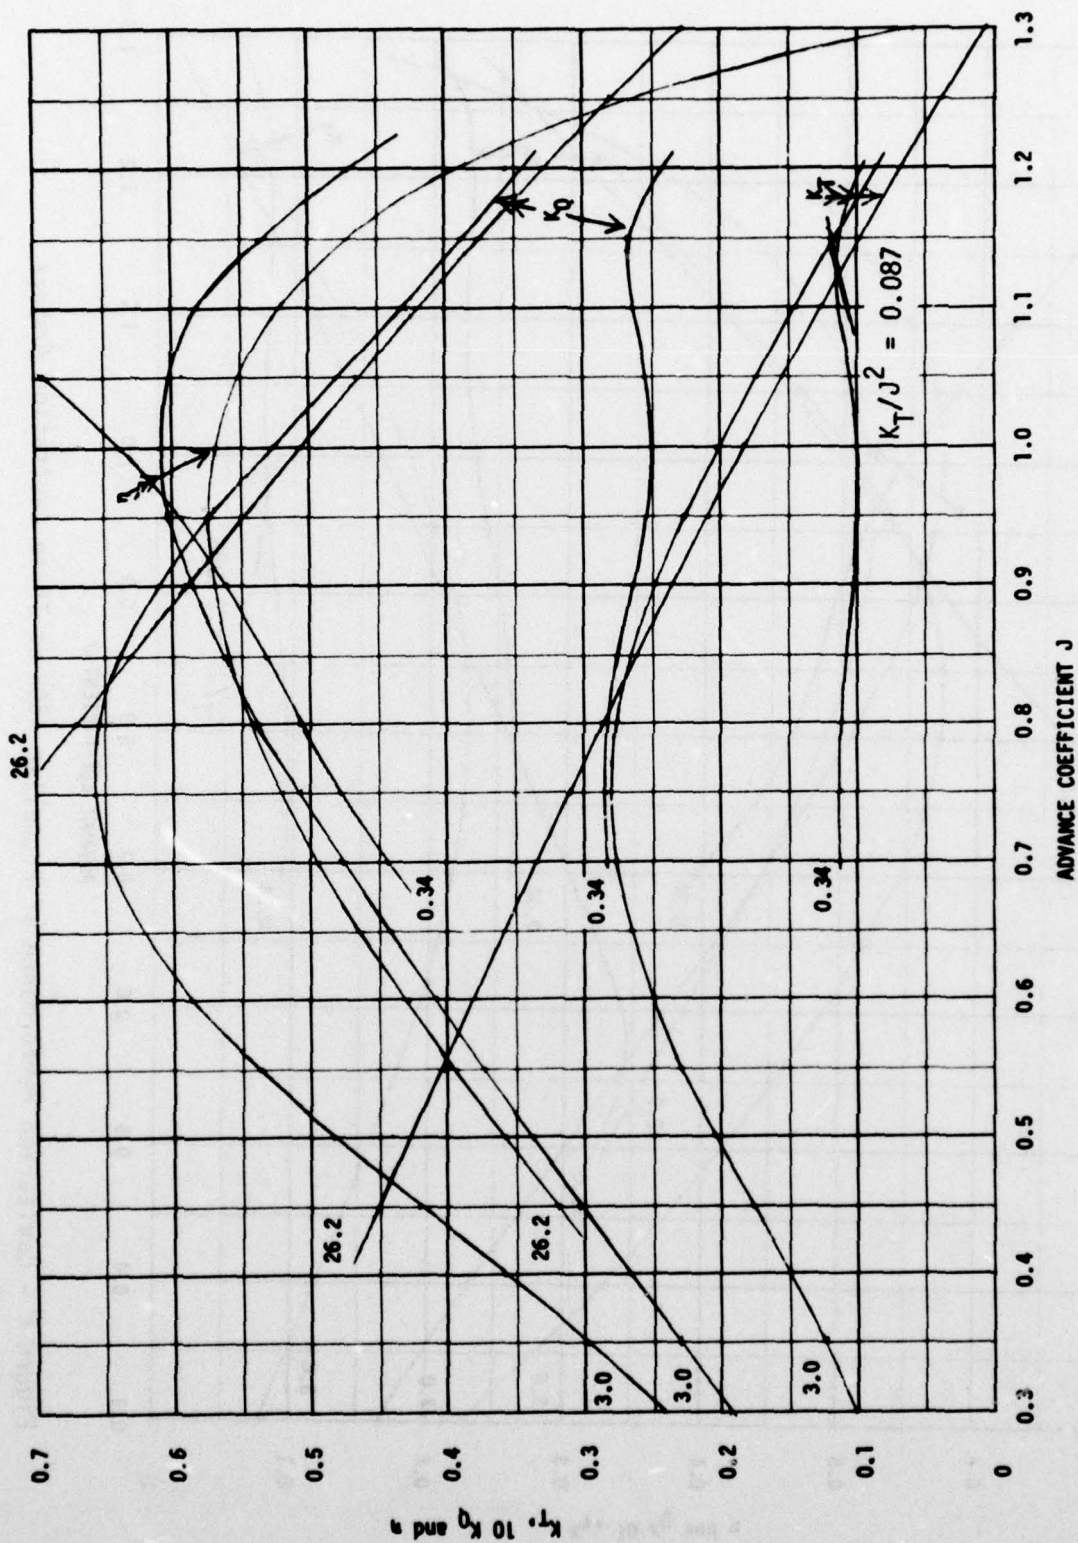


Figure 6 - Cavitation Performance of Propeller 4699 at Three Cavitation Numbers



Figure 7 - Photograph of Propeller 4698 at Design Condition



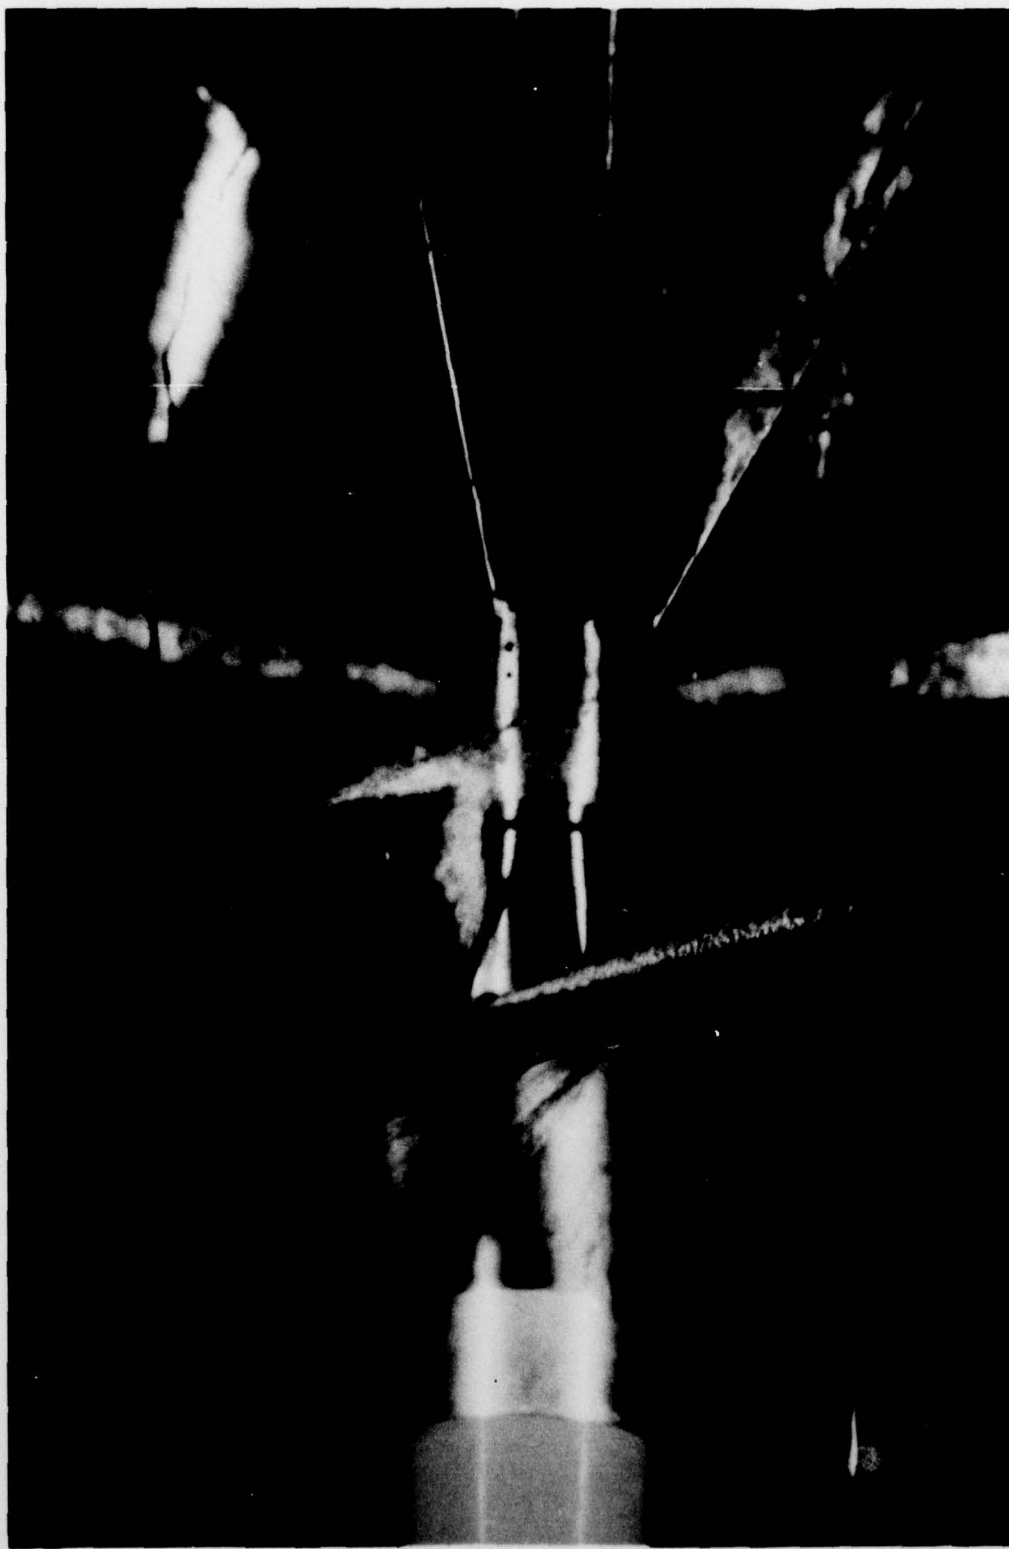


Figure 8 - Photograph of Propeller 4699 at Design Condition


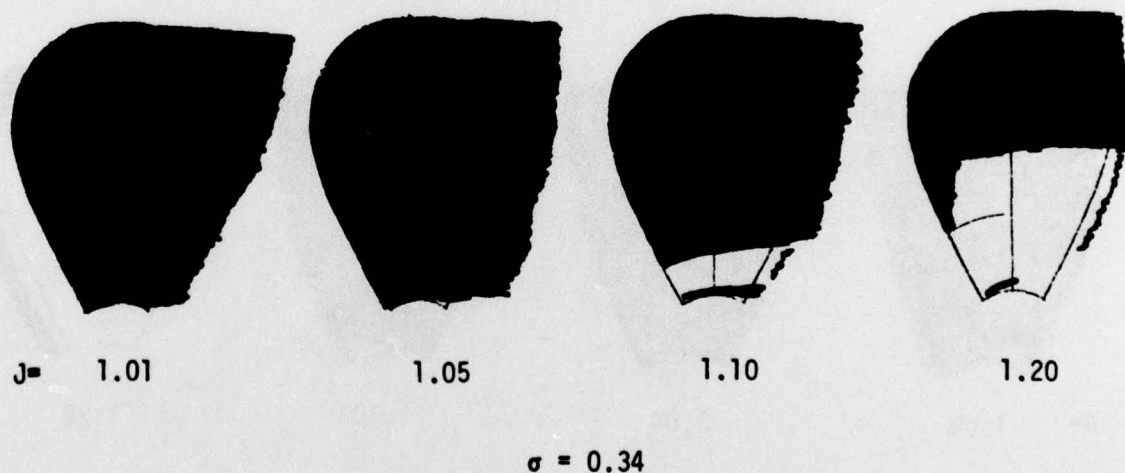


Figure 9 - Sketches of Cavitation Present on the Back of Propeller 4698 at Two Cavitation Numbers

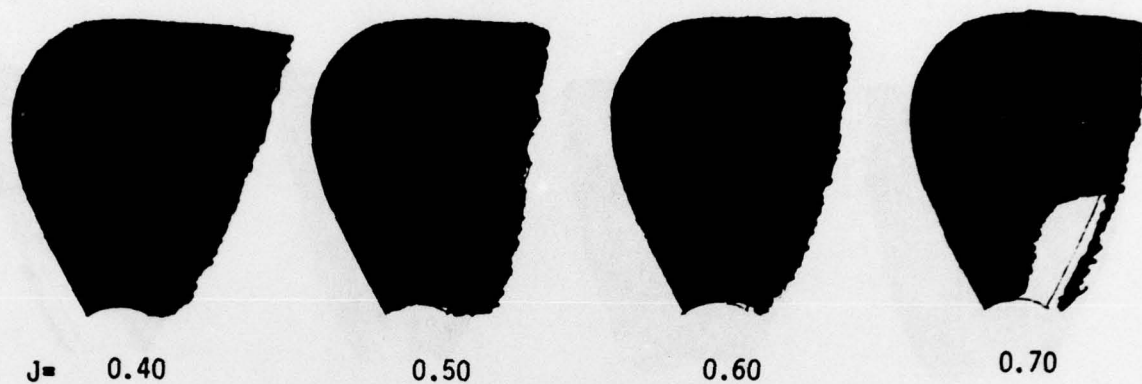

J= 0.388

0.50

0.60

0.70

$\sigma = 3.0$



J= 1.00

1.04

1.10

1.20

$\sigma = 0.34$

Figure 10 - Sketches of Cavitation Present on the Back of Propeller 4699 at Two Cavitation Numbers

TABLE 1  
PROPELLER DESIGN CONDITIONS

Power, max. cont.	16000 HP (16213.3 Metric HP) for two propellers
$1 - t$	0.925
$1 - w_t$	0.870
Shaft Centerline at Design Speed	6.82 ft (2.079 m)
Maximum D	5 ft (1.524 m)
No. of Blades	4
Design Objective	maximum speed
Minimum Rotative Speed	750 rpm
Hump Thrust Margin	20%

TABLE 2  
PROPELLER DESIGN CHARACTERISTICS

Propeller Number Designed by	<u>4698</u> Hydronautics, Inc.	<u>4699</u> DTNSRDC
$V_S$	58.5 kts	59.0 kts
$N_S$	1020	1000
$K_T$	0.090	0.0943
J	1.01	1.04
$\sigma$	0.34	0.34
$\eta$	0.62	0.64



TABLE 3  
MODEL PROPELLER GEOMETRY

<u>Propeller Number</u>	<u>4698</u>	<u>4699</u>
Number of Blades	4	4
Diameter, Inches (m)	16.000 (.4064)	16.000 (.4064)
Pitch at 0.7R, Inches (m)	22.389 (.5687)	22.683 (.5761)
P/D at 0.7R	1.399	1.418
Expanded Area Ratio	0.350	0.492
Chord Length at 0.7R, Inches (m)	3.421 (.0869)	4.547 (.1155)

TABLE 4  
SCOPE OF EXPERIMENTS

<u>Propeller 4698</u>			<u>Propeller 4699</u>		
$\sigma$	$V_{fps}$	J	$\sigma$	$V_{fps}$	J
12.0	15.0	0.5-1.3	26.2	15.0	0.45-1.5
6.0	15.0	0.4-1.5	3.0	15.0	0.3-1.2
3.0	30.0	0.337-1.2	1.5	30.0	0.5-1.2
0.4	35.0	0.7-1.2	0.75	30.0	0.5-1.2
0.34	35.0	0.7-1.2	0.4	35.0	0.7-1.2
0.3	35.0	0.7-1.2	0.34	35.0	0.7-1.2
			0.3	35.0	0.7-1.2



TABLE 5

## CAVITATION PERFORMANCE OF PROPELLER 4698

SIGMA = 12.000				SIGMA = 6.000			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.5000	.3240	.7790	.3310	.4000	.1916	.4952	.2463
.5500	.3429	.8364	.3588	.4500	.2195	.5456	.2881
.6000	.3610	.8805	.3874	.5000	.2430	.5953	.3248
.6500	.3764	.9125	.4156	.5500	.2611	.6389	.3577
.7000	.3900	.9400	.4424	.6000	.2734	.6726	.3887
.7500	.4007	.9677	.4660	.6500	.2797	.6940	.4160
.8000	.4090	.9950	.4870	.7000	.2799	.7022	.4441
.8500	.4120	.9919	.5046	.7500	.2743	.6971	.4698
.9000	.4090	.9800	.5167	.8000	.2634	.6795	.4936
.9500	.4067	.9611	.5214	.8500	.2477	.6510	.5148
1.0000	.4042	.9328	.5197	.9000	.2270	.6136	.5320
1.0500	.4008	.8927	.5085	.9500	.2048	.5696	.5435
1.1000	.4010	.8490	.4847	1.0000	.1790	.5214	.5465
1.1500	.4008	.8011	.4429	1.0500	.1516	.4714	.5373
1.2000	.4031	.7207	.3750	1.1000	.1231	.4216	.5110
1.2500	.4080	.6225	.2975	1.1500	.0942	.3737	.4614
1.3000	.4010	.5150	.1585	1.2000	.0656	.3286	.3817
				1.2500	.0376	.2869	.2617
				1.3000	.0105	.2464	.0887
				1.3500	-.0157	.2063	-.1631
				1.4000	-.0417	.1627	-.5647

SIGMA = 3.000				SIGMA = .400			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.3000	.0779	.2220	.1675	.7000	.0970	.2620	.4124
.3500	.1007	.2806	.1991	.7500	.0987	.2645	.4454
.4000	.1203	.3302	.2320	.8000	.0941	.2630	.4554
.4500	.1391	.3742	.2667	.8500	.0884	.2580	.4637
.5000	.1577	.4147	.3018	.9000	.0848	.2513	.4831
.5500	.1747	.4524	.3380	.9500	.0842	.2453	.5190
.6000	.1910	.4872	.3744	1.0000	.0867	.2417	.5670
.6500	.2055	.5183	.4107	1.0500	.0896	.2416	.6194
.7000	.2172	.5442	.4448	1.1000	.0927	.2441	.6613
.7500	.2257	.5633	.4777	1.1500	.0927	.2459	.6867
.8000	.2285	.5739	.5060	1.2000	.0880	.2405	.6987
.8500	.2267	.5747	.5327				
.9000	.2182	.5647	.5534				
.9500	.2040	.5434	.5674				
1.0000	.1843	.5117	.5732				
1.0500	.1601	.4714	.5677				
1.1000	.1334	.4255	.5488				
1.1500	.1067	.3791	.5157				
1.2000	.0841	.3389	.4738				

SIGMA = .340				SIGMA = .300			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.7000	.0919	.2600	.3934	.7000	.0940	.2580	.4050
.7500	.0949	.2606	.4300	.7500	.0916	.2603	.4190
.8000	.0957	.2610	.4650	.8000	.0930	.2607	.4506
.8500	.0917	.2578	.4815	.8500	.0941	.2574	.4908
.9000	.0869	.2508	.4963	.9000	.0904	.2503	.5176
.9500	.0824	.2416	.5155	.9500	.0846	.2406	.5303
1.0000	.0794	.2330	.5435	1.0000	.0791	.2304	.5467
1.0500	.0791	.2274	.5817	1.0500	.0777	.2217	.5828
1.1000	.0808	.2260	.6263	1.1000	.0798	.2162	.6464
1.1500	.0833	.2280	.6685	1.1500	.0836	.2143	.7118
1.2000	.0845	.2292	.6960	1.2000	.0790	.2151	.7017
1.2500	.0770	.2211	.6923				
1.3000	.0560	.1900	.6193				

TABLE 6

## CAVITATION PERFORMANCE OF PROPELLER 4699

SIGMA = 26.200				SIGMA = 3.000			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.4500	.4517	1.0120	.3194	.3000	.1001	.2444	.1955
.5000	.4771	.9514	.3572	.3500	.1229	.2970	.2304
.5500	.4835	.8963	.3940	.4000	.1495	.3576	.2661
.6000	.3807	.8457	.4294	.4500	.1775	.4210	.3020
.6500	.3572	.7944	.4624	.5000	.2044	.4825	.3377
.7000	.3339	.7546	.4929	.5500	.2294	.5385	.3732
.7500	.3101	.7124	.5196	.6000	.2504	.5859	.4081
.8000	.2857	.6714	.5410	.6500	.2680	.6223	.4422
.8500	.2607	.6311	.5590	.7000	.2754	.6463	.4754
.9000	.2351	.5908	.5788	.7500	.2760	.6568	.5078
.9500	.2087	.5501	.5737	.8000	.2744	.6537	.5367
1.0000	.1817	.5087	.5606	.8500	.2695	.6376	.5634
1.0500	.1541	.4662	.5525	.9000	.2603	.6096	.5859
1.1000	.1259	.4223	.5221	.9500	.2274	.5710	.6027
1.1500	.0977	.3768	.4714	1.0000	.2019	.5271	.6096
1.2000	.0677	.3294	.3923	1.0500	.1710	.4705	.6043
1.2500	.0375	.2802	.2667	1.1000	.1430	.4105	.5814
1.3000	.0064	.2308	.0979	1.1500	.1137	.3477	.5364
1.3500	-.0248	.1752	-.3166	1.2000	.0875	.2558	.4604
1.4000	-.0545	.1193	-----				
1.4500	-.0950	.0610	-----				
1.5000	-.1331	.0002	-----				

SIGMA = 1.500				SIGMA = .750			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.5000	.1200	.3099	.3081	.5000	.1020	.2556	.3175
.5500	.1150	.3368	.2510	.5500	.1141	.2835	.3521
.6000	.1514	.3713	.3907	.6000	.1160	.2910	.3807
.6500	.1600	.4089	.4294	.6500	.1159	.2924	.4100
.7000	.1872	.4454	.4687	.7000	.1102	.2963	.4444
.7500	.2027	.4773	.5070	.7500	.1240	.3066	.4854
.8000	.2144	.5014	.5444	.8000	.1352	.3233	.5324
.8500	.2214	.5162	.5804	.8500	.1474	.3437	.5811
.9000	.2224	.5194	.6124	.9000	.1592	.3635	.6273
.9500	.2144	.5119	.6393	.9500	.1644	.3780	.6675
1.0000	.2034	.4929	.6540	1.0000	.1694	.3824	.6984
1.0500	.1853	.4644	.6670	1.0500	.1612	.3754	.7174
1.1000	.1631	.4291	.6653	1.1000	.1464	.3554	.7203
1.1500	.1401	.3909	.6550	1.1500	.1262	.3277	.7067
1.2000	.1210	.3550	.6514	1.2000	.1044	.2994	.6752

SIGMA = .400				SIGMA = .340			
J	KTOUT	10KQOUT	EFFIC	J	KTOUT	10KQOUT	EFFIC
.7000	.1120	.2810	.6441	.7000	.1120	.2820	.6424
.7500	.1106	.2839	.5024	.7500	.1131	.2810	.6702
.8000	.1144	.2810	.5205	.8000	.1172	.2811	.5082
.8500	.1080	.2730	.5337	.8500	.1084	.2749	.5333
.9000	.1046	.2660	.5630	.9000	.1033	.2644	.5594
.9500	.1064	.2621	.6142	.9500	.0994	.2545	.5920
1.0000	.1124	.2640	.6764	1.0000	.1007	.2505	.6375
1.0500	.1100	.2762	.7306	1.0500	.1054	.2540	.6914
1.1000	.1234	.2849	.7994	1.1000	.1124	.2645	.7430
1.1500	.1184	.2853	.8610	1.1500	.1134	.2680	.7772
1.2000	.1000	.2550	.8402	1.2000	.0960	.2420	.7975

SIGMA = .300			
J	KTOUT	10KQOUT	EFFIC
.7000	.1110	.2791	.6432
.7500	.1087	.2735	.6745
.8000	.1114	.2784	.5202
.8500	.1140	.2776	.5604
.9000	.1097	.2668	.5884
.9500	.1015	.2510	.6117
1.0000	.0941	.2387	.6414
1.0500	.0975	.2353	.6822
1.1000	.1054	.2429	.7404
1.1500	.1110	.2505	.8110
1.2000	.0940	.2321	.7710

BEST AVAILABLE COPY

TABLE 7  
PROPELLER OPERATIONAL POINTS

<u>Propeller Number</u>	<u>4698</u>		<u>4699</u>	
	<u>Design</u>	<u>Model Data</u>	<u>Design</u>	<u>Model Data</u>
V kts	58.5	58.5	59.0	59.0
J	1.01	0.96	1.04	1.13
N	1020	1073	1000	920
n	0.62	0.52	0.64	0.77



**DTNSRDC ISSUES THREE TYPES OF REPORTS**

- 1. DTNSRDC REPORTS, A FORMAL SERIES, CONTAIN INFORMATION OF PERMANENT TECHNICAL VALUE. THEY CARRY A CONSECUTIVE NUMERICAL IDENTIFICATION REGARDLESS OF THEIR CLASSIFICATION OR THE ORIGINATING DEPARTMENT.**
- 2. DEPARTMENTAL REPORTS, A SEMIFORMAL SERIES, CONTAIN INFORMATION OF A PRELIMINARY, TEMPORARY, OR PROPRIETARY NATURE OR OF LIMITED INTEREST OR SIGNIFICANCE. THEY CARRY A DEPARTMENTAL ALPHANUMERICAL IDENTIFICATION.**
- 3. TECHNICAL MEMORANDA, AN INFORMAL SERIES, CONTAIN TECHNICAL DOCUMENTATION OF LIMITED USE AND INTEREST. THEY ARE PRIMARILY WORKING PAPERS INTENDED FOR INTERNAL USE. THEY CARRY AN IDENTIFYING NUMBER WHICH INDICATES THEIR TYPE AND THE NUMERICAL CODE OF THE ORIGINATING DEPARTMENT. ANY DISTRIBUTION OUTSIDE DTNSRDC MUST BE APPROVED BY THE HEAD OF THE ORIGINATING DEPARTMENT ON A CASE-BY-CASE BASIS.**